



Colour options:




SKU	Watts	Colour	lm/W	Lumens	Beam	Type
Non-Dimmable						
AA-DLG7-30*	7W	3000K	93	650	60°	Fixed
AA-DLG7-40*	7W	4000K	100	700	60°	Fixed
AA-DLGT7-30*	7W	3000K	93	650	60°	Adjustable
AA-DLGT7-40*	7W	4000K	100	700	60°	Adjustable
Dimmable						
AA-DDLG10-30*	10W	3000K	93	930	60°	Fixed
AA-DDLG10-40*	10W	4000K	100	1000	60°	Fixed
AA-DDLGT10-30*	10W	3000K	93	930	60°	Adjustable
AA-DDLGT10-40*	10W	4000K	100	1000	60°	Adjustable

*Add suffix **W** or **BLK** for White or Black finish


Triac, Dali, 1-10V dimmable & EM options available, contact sales office for more information

Line Drawing



AA-DLG7 / DLGT7	AA-DDLG10 / DDLGT10
(H) 40mm Height	(H) 40mm Height
(OD) 95mm Overall (∅)	(OD) 95mm Overall (∅)
(CO) 83mm Cutout (∅)	(CO) 83mm Cutout (∅)

Polar Curves

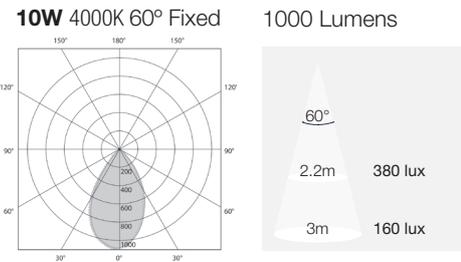

Product Features:

- Low profile fixture, ideal for installations with limited ceiling void depths
- Sleek baffled design with the light source recessed back to reduce glare
- 60° beam angle for uniform light distribution (non tilt option)
- Flicker free

Product Specification:

Installation Type	Recessed
Input Voltage	220 - 240V
Luminaire Materials	Aluminium
Lifetime L80	50,000
CRI	>80
IK Rating	IK03
IP Rating - Fixed	IP44
IP Rating - Adjustable	IP54 Front (IP20 Back)
Warranty	5 Years

Warranty:

This product has a warranty period of 5 Years. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserve the right to alter.