



**COLOUR
SELECTABLE**

**WATTAGE
SELECTABLE**

SKU	Watts	lm/W	Lumens	Colour	Beam
AA-BH020WS-CSW	11W / 14W / 17W / 20W	up to 116	1060-2205lm	3000K / 4000K / 5000K	120°
AA-BH020WS-CSB	11W / 14W / 17W / 20W	up to 116	1060-2320lm	3000K / 4000K / 5000K	120°


Microwave sensor option available, contact sales office for more information

Colour options:




Black White

Line Drawing

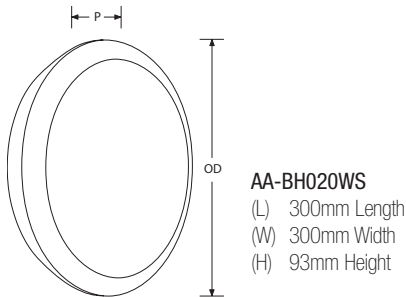

Polar Curves



Product Features:

- Colour temperature can be switched between 3000K, 4000K and 5000K
- Wattage selectable
- Rear entry access wiring
- compartment allows for easy installation and switch access
- For ambient temperatures from -20° C to 40° C
- Flicker free
- 1kV surge protection
- Flicker free
- 10kV surge protection

Product Specification:

Installation Type	Surface Mounted
Input Voltage	220 - 240V
Luminaire Materials	Polycarbonate
Lifetime	50,000
CRI	80
IK Rating	IK10
IP Rating	IP66
Warranty	5 Years

Warranty:

This product has a warranty period of 5 Years. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserve the right to alter.